



Commercial Vehicle
products





Manufacturing experts

Jonesco are the trusted brand for commercial vehicle manufacturers and aftermarket suppliers across the globe.

Our story began in 1967 on Adelaide Street near Preston city centre. It is safe to say we have grown a bit since then.

Doing things better is why Jonesco exists. It is why we deliver the products you need, whenever and wherever you need them. Working Smarter. Not harder. Our rotationally moulded products can be found worldwide and our uncompromising commitment to quality means they are made to last.



Who we are

Jonesco's headquarters are in Preston, Lancashire, UK with a subsidiary in Seclin, France. Our chain of distribution covers over 60 countries and spans every continent. We're truly global but we've not lost our family touch.



Contents

Mudguards HighGard J-Wing XGard	4
Fixing systems Metal Plastic	24
Mudflaps Anti-spray Plain	28
Onboard storage Toolboxes Storage boxes	32
Onboard containment AwayWash	38
Document holders Cylindrical Square	42
Wheel chocks Small Large Foldable	46
Fire and Safety Front loading Top loading Military Safety Fire extinguishers Accessories	50
Appendix Mounting Storage Spray suppression Palletisation Conditions of sale and delivery	58

Mudguards

HighGard | J-Wing | XGard

A comprehensive range of premium quality mudguards in a choice of applications, sizes and finishes.

All Jonesco mudguards offer strong durability with high impact resistance and are proven to perform in extreme climates. They are manufactured from fully recyclable, UV resistant polyethylene.

Struggling to find the right size? No problem, head over to jonesco-plastics.com for our new and improved mudguard filter.




	HighGard	J-Wing	XGard
Single arch	✓	✓	✓
Section	✓	✓	✓
Flat top		✓	✓
Tandem		✓	✓
Small trailer		✓	✓
Spats		✓	
Patterned textured finish	✓		
Gloss finish		✓	
Matt textured finish			✓
Available with welded rails for use with adjustable fixings ¹	✓	✓	✓
Silver line for improved visibility	✓		
Available in a range of colours (minimum order quantities applies)		✓	✓

¹ Single arch & Section mudguards only


HighGard



The HighGard range features a unique patterned textured finish that minimises surface scratches. A light sliver edge improves visibility. Made from extruded high density polyethylene offering superior performance. Available in [single arch and sections](#).



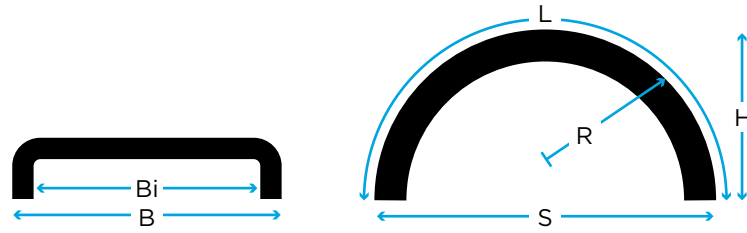

	B_i (mm)	B (mm)	R (mm)	L (mm)	S (mm)	H (mm)
HL09	280	290	410	1280	815	410
HL22A	420	430	440	1380	880	440
HL26A	420	430	635	1900	1270	585
HL26B	420	430	635	1900	1270	630
HL28	450	460	480	1500	860	480
HL30C	450	460	640	2050	1280	660
HL31	450	460	640	1930	1280	600
HL31A	450	460	590	1855	1180	590
HL33	485	495	510	1600	1020	510
HL34	485	495	550	100	1100	535
HL35	485	495	600	1840	1200	580
HL38C	510	520	660	2050	1320	650
HL39B	530	540	510	1610	1020	515
HL39D	520	530	550	1790	1100	580
HL40	550	560	550	1700	1100	540
HL41	550	560	635	1930	1270	600
HL42A	595	605	510	1580	1020	500
HL42B	595	605	550	1700	1100	540
HL43A	610	620	640	1930	1280	600
HL43D	610	620	550	1790	1100	580
HL43G	610	620	650	1525	1145	430
HL45A	650	660	650	2090	1300	680
HL45B	650	660	650	2090	1300	580
HL45D	650	660	650	1220	1030	270
HL45E	650	660	650	1525	1145	400
HL47	670	680	650	1200	1030	270
HL47B	670	680	540	1700	1080	540
HL47D	670	680	600	1650	1200	460
HL47F	670	680	630	2100	1260	690
HL47G	670	680	650	1900	1300	580
HL47M	670	680	710	2090	1425	640

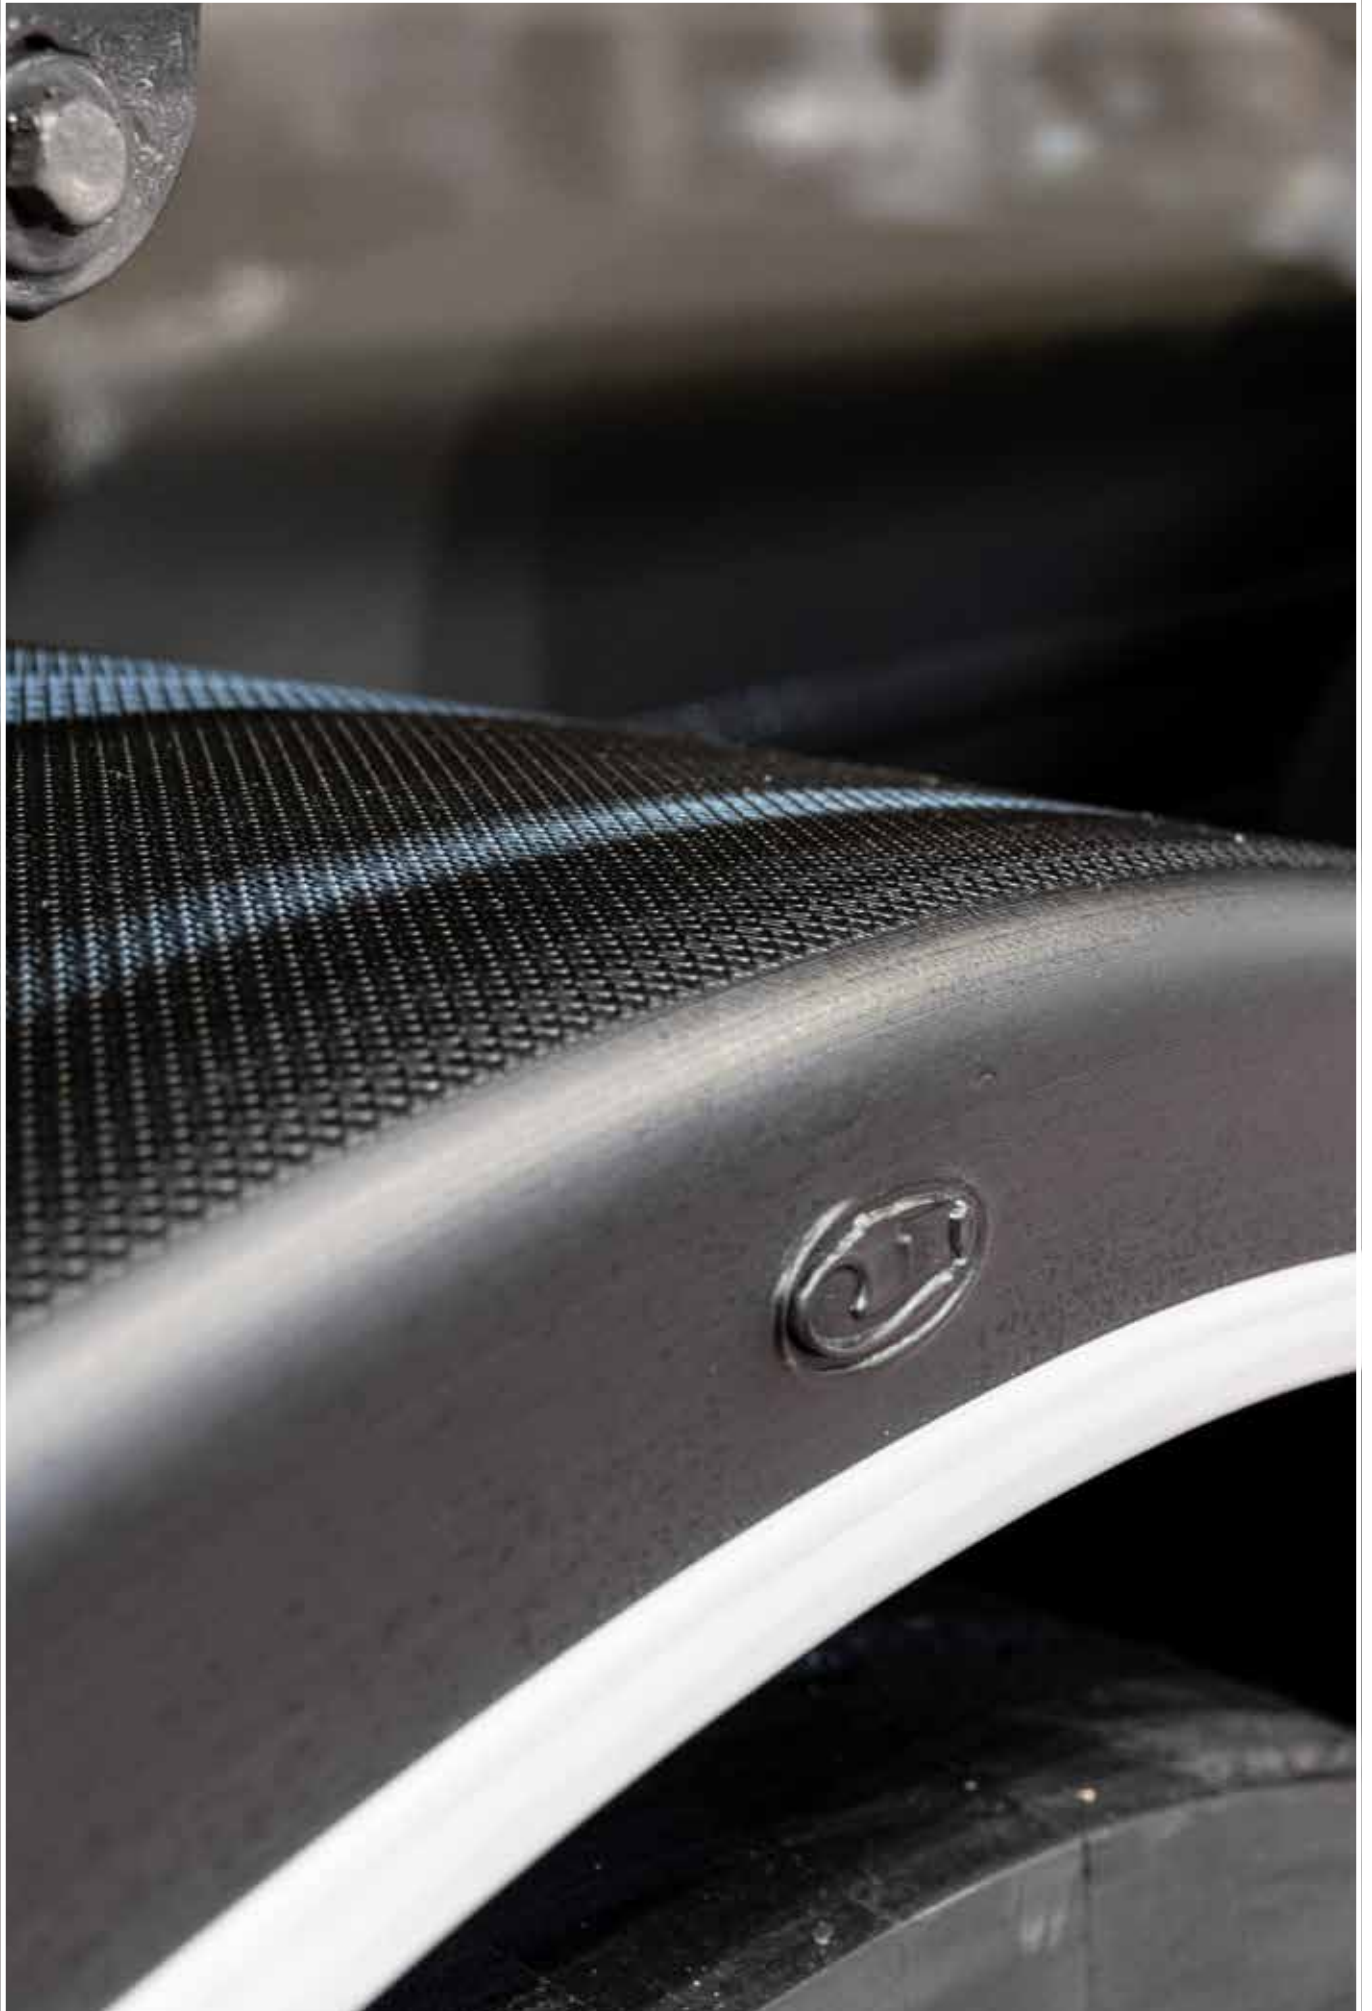



	Bi (mm)	B (mm)	R (mm)	L (mm)	S (mm)
HLS26A	420	430	635	700	665
HLS26B	420	430	635	650	620
HLS26C	420	430	635	1000	900
HLS31	450	460	640	650	620
HLS31B	450	460	640	1000	900
HLS39B	530	540	510	650	610
HLS40	550	560	550	650	615
HLS43A	610	620	640	650	620
HLS45A	650	660	650	650	620
HLS47	670	680	685	650	630




J-Wing

The J-Wing is our original and largest range of rotationally moulded mudguards, one of the most comprehensive on the market. Featuring a gloss finish and available in a range of colours (minimum order quantities apply). Available in [single arch](#), [sections](#), [flat tops](#), [tandems](#), [small trailer](#) and [spats](#).



J-Wing


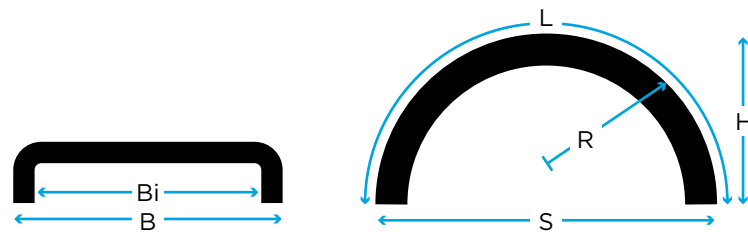


Single arch

	Bi (mm)	B (mm)	R (mm)	L (mm)	S (mm)	H (mm)
J01	195	200	410	1370	830	450
J01SE	215	220	375	1210	750	390
J06C	255	270	470	1600	950	530
J09	270	290	410	1280	815	410
J12	285	300	550	1730	1110	550
J19A	380	400	410	1370	820	450
J22A	405	425	440	1430	880	480
J23	360	380	670	2140	1340	690
J24A	405	425	580	1930	1160	635
J24B	405	425	640	1950	1260	610
J24C	410	430	645	2080	1300	670
J25	380	400	670	2140	1340	690
J27	455	475	430	1430	860	480
J28	455	475	480	1650	960	560
J29	455	475	510	1850	1050	560
J30C	455	475	650	2150	1300	685
J31	440	460	640	1900	1280	580
J33	485	505	510	1650	100	560
J34	485	505	530	1790	1060	585
J35	485	505	580	1790	1200	560
J38C	510	530	650	2080	1300	685
J39	530	550	615	1930	1230	610
J39B	530	550	510	1680	1020	545
J39C	530	550	435	1350	860	430
J41	560	580	640	1930	1310	620
J42	580	600	640	1930	1285	610
J43A	610	630	640	1930	1270	610
J43B	610	630	550	1830	1100	585
J44	610	630	550	1830	1100	585
J45A	650	670	650	2060	1360	660
JDV45	650	670	600	1930	1200	640
J45B	640	660	635	1900	1285	590
J45C	640	660	615	1900	1270	600
J47	670	690	690	2110	1400	660
J47B	670	690	535	1700	1070	540
J48	710	730	650	2030	1300	650



	Bi (mm)	B (mm)	R (mm)	L (mm)	S (mm)
JS11	250	270	660	600	580
JS19	330	350	650	720	685
JS21	380	400	670	700	670
JS23	380	400	670	850	795
JS26	400	420	700	1150	1025
JS29	430	450	670	700	670
JS30A	455	475	690	660	635
JS31	430	450	650	1070	950
JS40	530	550	500	835	740
JS43A	610	630	640	640	615
JS45A	650	670	640	640	615
JS47	670	690	640	640	615



J-Wing


Flat tops




J25SF




	Bi (mm)	B (mm)	L / L1 (mm)	S (mm)	H / H1 (mm)
J05F	200	220	490	890	480
J25SF	410	430	665 / 500	880	560 / 110
J27F	450	470	500	880	450
J28F	450	470	500	1000	525
J36F	450	470	700	1320	710
J41F	550	570	630	1130	550
J43F	600	620	700	1250	625
J46F	650	670	750	1360	720

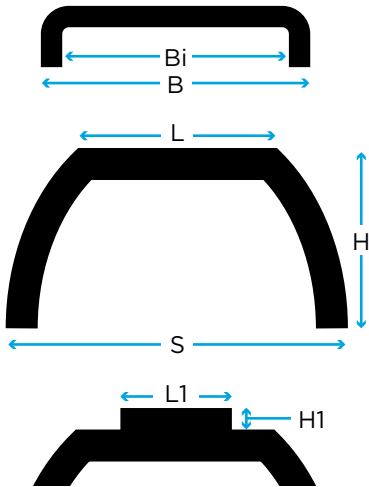

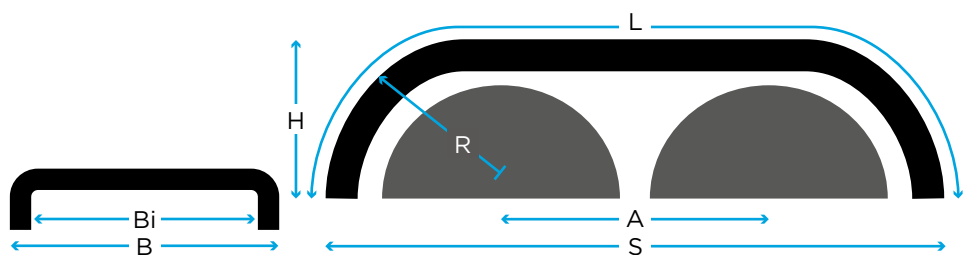

	Bi (mm)	B (mm)	R (mm)	L (mm)	S (mm)	H (mm)	A (mm)
JT610	620	640	635	3290	2675	610	1370
JT65A	650	670	635	3570	2970	640	1625



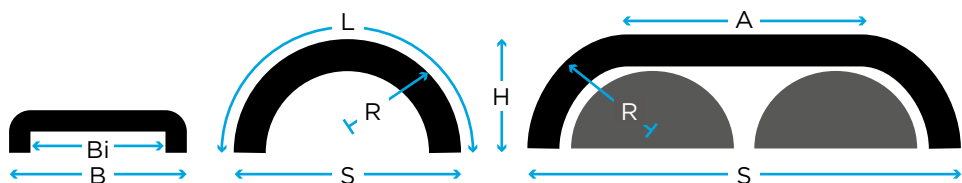

	Bi (mm)	B (mm)	R (mm)	L (mm)	S (mm)	H (mm)	A (mm)
SINGLE ARCH							
J01	195	200	410	1370	830	450	-
J01SE	215	220	375	1210	750	390	-
TANDEMS							
JT1864	180	190	290	-	1220	250	635
JT1878	180	190	355	-	1500	450	790
JT2082	205	215	355	-	1540	450	825
JT2086	200	210	445	-	1750	530	860








L



SP



	Bi (mm)	B (mm)	H (mm)
SP450	440	450	410
SP650	640	650	600
L28	265	280	380
L43	425	440	420
L46	445	460	600
L54	525	540	500
L61	625	640	500
L66	645	660	600





XGard

The XGard range features a matt textured finish and ribbed design for added strength. Available in a range of colours (minimum order quantities apply). Available in [single arch](#), [sections](#), [flat tops](#), [tandems](#) and [small trailer](#).



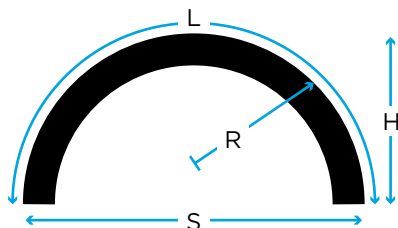


	Bi (mm)	B (mm)	R (mm)	L (mm)	S (mm)	H (mm)
JX24	405	420	655	2150	1320	700
JX26	410	425	620	1900	1255	595
JX33	485	500	510	1650	1020	560
JX39	485	505	635	1910	1280	620
JX43A	615	630	640	1930	1275	605
JX43N	620	635	595	1905	1195	610
JX45	655	670	650	2000	1310	630





	Bi (mm)	B (mm)	R (mm)	L (mm)	S (mm)
JXS21	405	420	670	670	700
JXS45	655	670	670	670	700



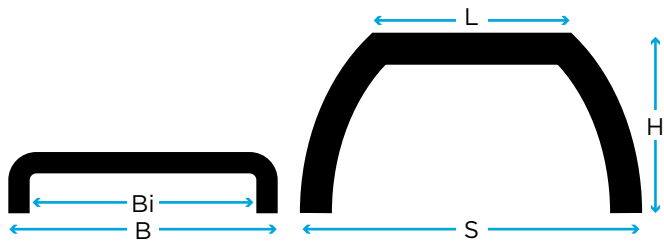


	B_i (mm)	B (mm)	L (mm)	S (mm)	H (mm)
JX06F	260	275	400	895	480
JX37F	500	515	400	1000	550




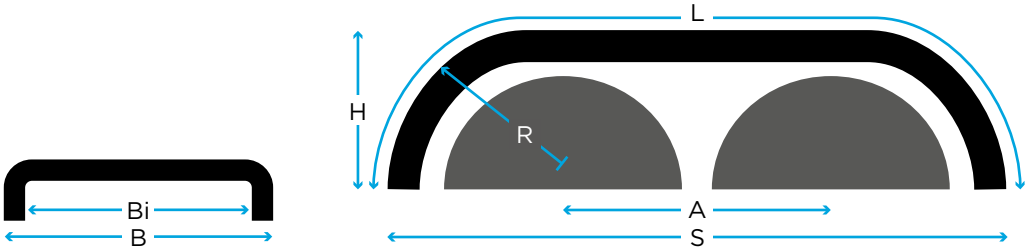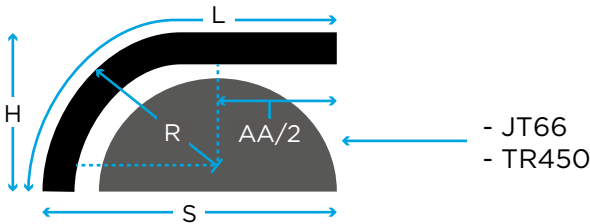

	Bi (mm)	B (mm)	R (mm)	L (mm)	S (mm)	H (mm)	A (mm)	AA/2 (mm)
JT650N	650	670	635	3385	2670	620	1400	-
JT98	650	670	635	2800	2490	410	1300	-
JT480N	480	505	945	3280	2640	620	1360	-
JTZ105	625	645	-	-	2680	585	1340	-
JT66	650	670	635	975	1340	650	-	-
TR450	450	470	670	1740	1370	670	-	700



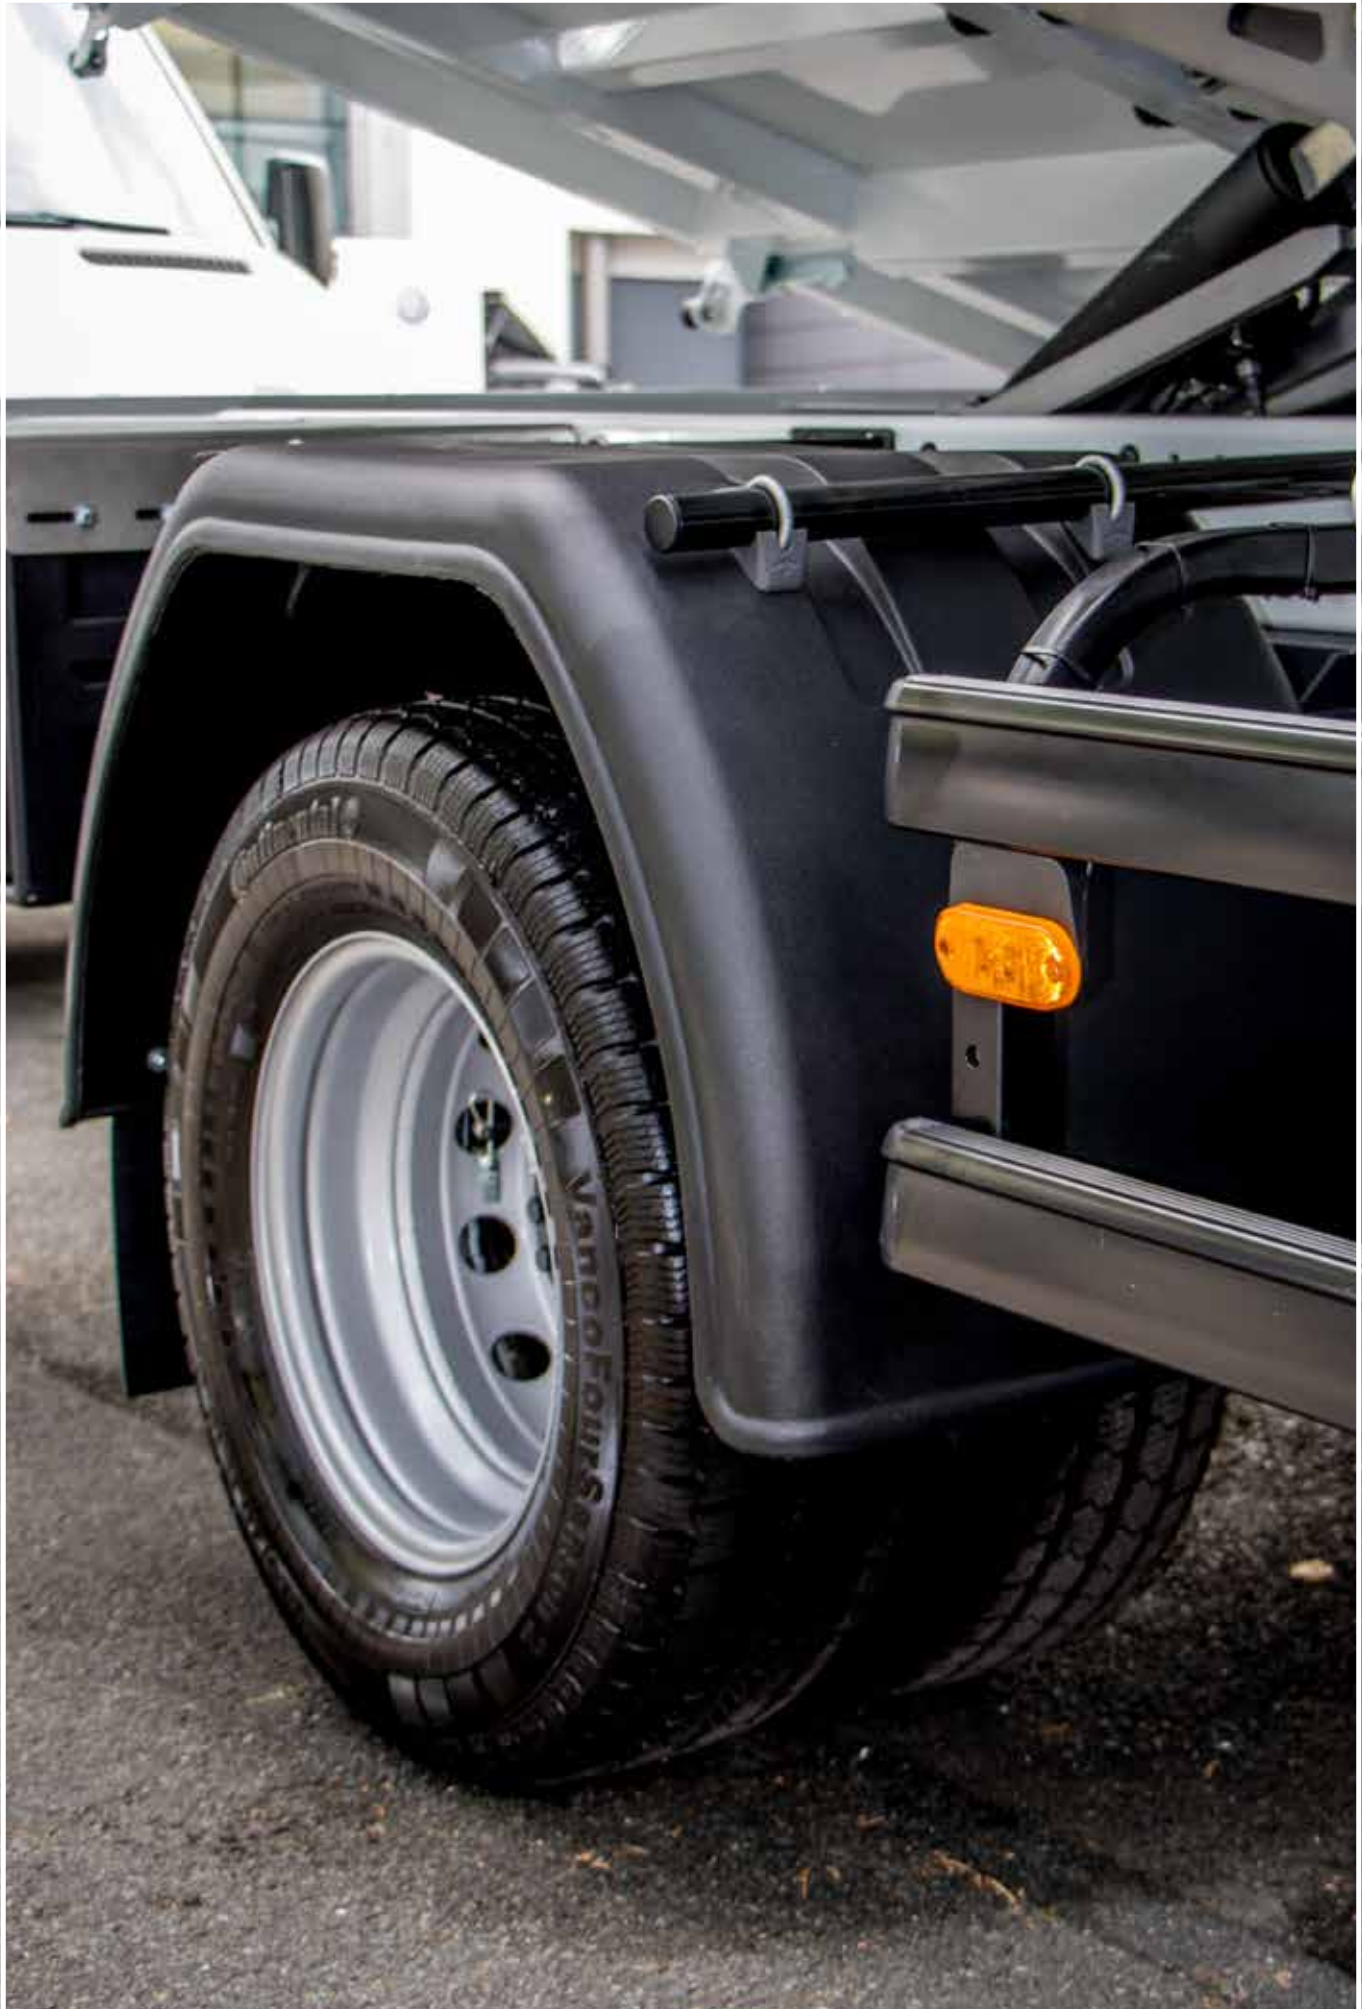

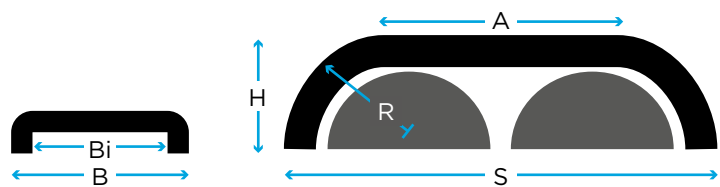

	Bi (mm)	B (mm)	R (mm)	S (mm)	H (mm)	A (mm)
JW21150	210	230	340	1500	425	660
JW2483	250	260	-	1580	380	830



Fixing systems

Metal | Plastic


A range of fixing systems for securing your Jonesco mudguards to commercial vehicles. Available in metal or plastic and fixed or adjustable to suit all applications.



	Metal	Plastic
Stays	✓	
Adjustable fixing		✓
Top clamp		✓
Zinc plated	✓	
Corrosion resistant	✓	✓

Metal stays for securing your Jonesco mudguard. Available in a triangular (A) 3-hole fixing, single central hexagonal (B) bolt fixing or square profile fixing rail (C). All our stays are zinc plated, corrosion resistant to 500 hours and come with a plastic end cap.

Hexagonal bolt fixing - Grade 8.8 complete with Nyloc nut, backing and welded support washers with a textured dome finish for extra grip and a true fixture.



	Ø (mm)	L (mm)	A	B	C	CH (mm)
JS1	34	650	✓	-	-	-
JS1/580	34	580	✓	-	-	-
JS1C	34	680	✓	-	-	100
JS1CL	34	800	✓	-	-	100
JS16	42	650	✓	-	-	-
JS16C	42	680	✓	-	-	100
JS16CL	42	800	✓	-	-	100
JS16L	42	740	✓	-	-	-
JS3	40	700	-	-	✓	-
JS4C	34	850	-	✓	-	100
JS4CM	34	750	-	✓	-	100
JS43D	42	600	-	✓	-	-
JS43DL	42	720	-	✓	-	-
JS43E	42	800	-	✓	-	100
JS50L	50	760	✓	-	-	-
JS50CL-TUBE	50	760	-	-	-	100



Plastic

Adjustable and Top clamp

Adjustable plastic fixing suitable for all Jonesco mudguards with integral plastic rails - radius > 510 mm, adjustable length 160 mm. Supplied ready assembled, easy to fit and secure. Lightweight and proven in extreme climates.

Top Clamp and backing plate with a stay adapter. Strong, light and ready assembled for self-fitment. Suitable for most mudguards with a radius > 560 mm. Resistant to most chemicals with corrosion resistant fasteners.



	Stay Ø (mm)	Adjustable
ADJUSTABLE		
KITZPA34	34	✓
KITZPA42	42	✓
KITZPA48	48	✓
TOP CLAMP		
KITXPF34	34	x
KITXPF38	38	x
KITXPF40	40	x
KITXPF42	42	x
KITXPF48	48	x
KITXPF50	50	x



Mudflaps

Anti-spray | Plain

Spray suppression made easy with a range of anti-spray and plain mudflaps.



	Anti-spray	Plain
Light	✓	✓
Durable	✓	✓
Self-cleaning	✓	
Improve visibility for other road users	✓	
EC homologation	✓	
Logo service	✓	✓

Anti-spray

Mudflaps, Side valances and Accessories


Anti-spray mudflaps and side valances designed to be fitted to Jonesco mudguards to provide additional spray protection and to improve visibility for other road users.

Self-cleaning, lightweight and durable. Option to customise with your logo (minimum order quantities apply). EC type approval number: **e6*109/2011*2015/166*0069*00**.



	H (mm)	W (mm)
MUDDLAPS		
JF3856	560	380
JF4056	560	400
JF4070	700	400
JF4656	560	460
JF4675	750	460
JF5565	650	550
JF61101	1010	610
JF61106	1060	610
JF61122	1220	610
JF6156	560	610
JF6161	610	610
JF6175	750	610
JF6556	560	650
JF6560	600	650
JF66122	1220	660
JF6665	650	660
JF7456	560	710

	H (mm)	W (mm)
SIDE VALANCES		
JV122150	150	1220
JV122200	200	1220
JV122300	300	1220
JV250390	390	2500



	H (mm)	W (mm)	D (mm)
ANTI-SAIL BARS			
EX3748SB	480	370	-
EX3768SB	680	370	-
EX3778SB	780	370	-
EX3787SB	870	370	-
EX4368SB	680	430	-
EX4378SB	780	430	-



Plain


Mudflaps and Accessories

A range of plain mudflaps which can be trimmed to your exact required width. Available with or without logos.

216040: HINO, MAN, RENAULT, SCANIA and VOLVO.

216540: DAF, HINO, MAN, MERCEDES, RENAULT, SCANIA and VOLVO

The above plain flaps with logo are stocked with no minimum order. Other logos are available, minimum order quantities apply.



	H (mm)	W (mm)
MUDFLAPS		
214030	300	400
214530	300	450
215030	300	500
216030	300	600
216040	400	600
216045	450	600
216092	920	600
216540	400	650
210600	-	600

	H (mm)	W (mm)
FITTING BAND & FIXINGS		
210500	-	500
210550	-	550
210600	-	600



Onboard storage

Toolboxes | Storage boxes

Get on-board with a range of storage solutions designed specifically with commercial vehicle fitment in mind.

From strong, lightweight toolboxes, to small boxes ideal for control instruments and vehicle sieves, there is a storage solution for all requirements.



	Toolboxes	Storage boxes
Excellent water ingress protection	✓	✓
Lockable with key operated locks	✓	✓
Latchlock for padlocks ¹		✓
Concealed handles prevent accidental opening	✓	
180° lid opening	✓	✓
Hinged opening	✓	✓
Detachable lid		✓
Can be incorporated into the side guard (Regulation No. 73 (UN/ECE))	✓	
UTAC approved - E2 73 R - 0112385	✓	
Full colour logo service available	✓	

¹ Padlock not included

Toolboxes

Onboard storage

Our market leading range of strong, durable and striking toolboxes.



Featuring a recessed lid and automotive grade rubber seals to minimise water ingress. Ergonomic flip handles for quick and easy access and secured with key operated locks.




Toolboxes

Onboard storage and Logos

Sharper, smarter and in full colour. Add some style with our next generation UV logo printing service.



	H (mm)	W (mm)	D (mm)	X (mm)	Weight (kg)	Max. load (kg)	Capacity (l)	Fixing kit
JBZ450	340	450	400	240 x 360	4.5	50	41	-
JBZ520	320	520	360	220 x 430	5.5	50	42	-
JBZ580	360	580	450	260 x 490	5.5	50	64	-
JBZ600	450	600	480	350 x 505	6.5	58	98	-
JBZ620	320	620	610	220 x 530	7	75	88	TBK620
JBZ620A			400		5	50	53	-
JBZ650	460	650	480	360 x 560	7.5	75	106	TBK650
JBZ700	480	700	490	380 x 610	8	75	132	TBK700
JBZ800	460	800	480	360 x 705	9	75	136	TBK800
JBZ800A			360		8.5	75	90	-
JBZ900	480	900	490	380 x 810	11	75	172	TBK900
JBZ1000	460	1000	480	360 x 905	12.5	75	167	TBK1000
JBZ1200	460	1190	480	360 x 1095	14	75	201	TBK1200

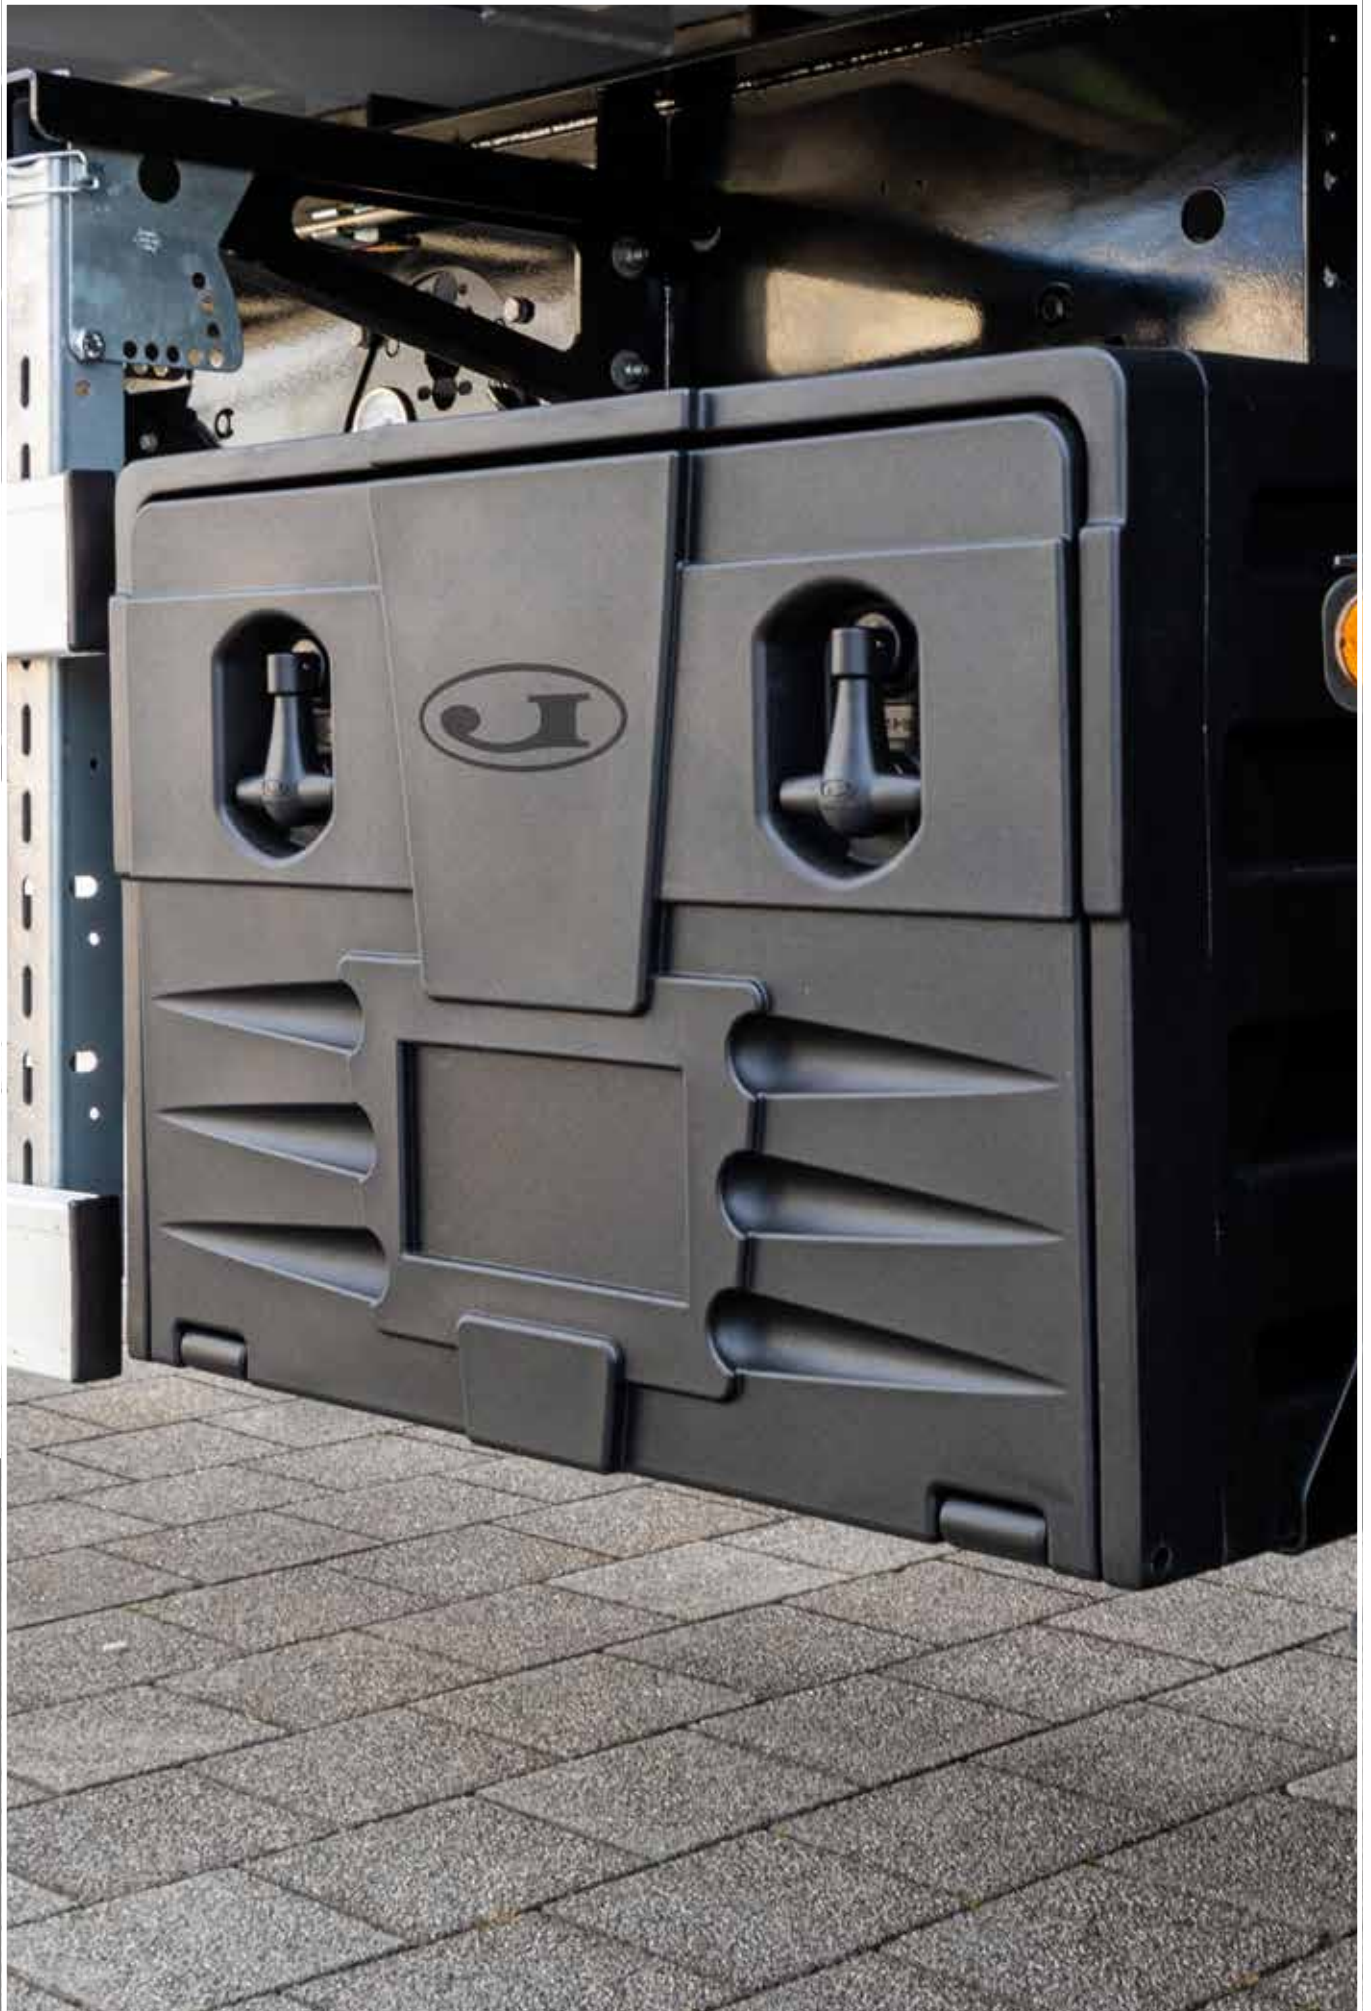


Storage boxes

Onboard storage

Storage designed for commercial vehicle applications. Ideal for general storage, storing control instruments or housing for sieves.

Strong, durable, space maximising and available with key lock access.



	H (mm)	W (mm)	D (mm)	Weight (kg)	Hinged Lid	Lockable
JBH67	320	670	230	4	✓	✓
JBL67					Detachable	✓
JBC40	275	400	330	4	✓	✓
JBC40T					✓	Latchlock
JBC100	230	980	900	12	✓	Latchlock



Onboard containment

AwayWash

Good for business, better for the planet.

AwayWash is a concrete washout solution for concrete mixer vehicles. A lightweight, polyethylene system carried on the vehicle and used at the point of concrete delivery, providing a solution to the reduction of on-site washout facilities for concrete delivery companies and drivers.



	AwayWash
Removes harmful washout water from sites	✓
Avoids washout water spillage on the roads	✓
Separates water from aggregates for easy recycling	✓
Easy to use and clean	✓
No mechanical parts	✓
Hose and sieve included	✓
45 litre capacity	✓
55 litre capacity	✓

AwayWash

Onboard containment

Available in two sizes to suit many concrete mixer configurations.


The unique design of AwayWash collects the washout water from the chute and separates the coarse material from the water. The alkaline washout water is taken away for recycling or to an appropriate disposal point and the retained aggregate can be reused or recycled.



55 litres



45 litres



	Colour options	H (mm)	W (mm)	D (mm)	Weight (kg)	Capacity (l)
CCRT-TS-YE	●	525	1860	760	21.5	55
CCRT2-TS-BK	●	500	610	560	11	45
CCRT2-TS-YE	●					





Document holders

Cylindrical | Square

A range of document holders ideal for external fitment to commercial vehicles and other industrial applications, such as containers, forklift trucks and agricultural equipment.

Easy to fit and suitable for both indoor and outdoor use. Lightweight, fully recyclable, and available in various colours (minimum order quantities may apply).




	Cylindrical	Square
Hinged lid		✓
Suitable for various document sizes	✓	✓
Suitable for A4 folders		✓
Rubber seal prevents water ingress	✓	
Screw lid connected with small chain	✓	
Tight fit snap-on lid		✓
Hinged lid		✓
Lockable with padlock ¹		✓

¹ Padlock not included

Cylindrical

Document holders

Safely secure your A3 or A4 documents. This document holder is fitted with a rubber seal between the lid and body, helping protect from water ingress, with a small chain connecting the lid to the body.



	Colour options	H (mm)	W (mm)	D (mm)	X (mm)	Weight (kg)
1005-COXX	● ● ●	345	155	125	180	0.55


XX = Colour options: RE: ● GY: ●
Remove '-COXX' for black only option.



Square

Document holders

The square document holder has a lid that opens 180° making it the ideal solution for storing A4 folders and A4 or US letter size paperwork. Easy to install, suitable for indoor and outdoor use and can be padlocked (padlock not included).



	Colour options	H (mm)	W (mm)	D (mm)	Weight (kg)
1006-COXX	● ●	335	355	100	1

XX = Colour options: RE: ●
Remove '-COXX' for black only option.



Wheel chocks

Small | Large | Foldable

A range of wheel chocks available in two sizes to suit many wheel dimensions, plus a space saving foldable option.





	Small	Large	Foldable
For wheels under 920 mm in diameter	✓		
For wheels over 920 mm in diameter		✓	✓
DIN 76051 certified	✓	✓	✓
TÜV certified	✓	✓	✓
Tested to -40°C	✓	✓	✓
Foldable			✓
Compact and space saving			✓
Wheel chock holders	✓	✓	✓

Small and Large

Wheel chocks

Strong, durable, anti-slip and highly visible wheel chocks. Certified by TÜV and in accordance with the ADR regulations. Made from UV stabilised HDPE.

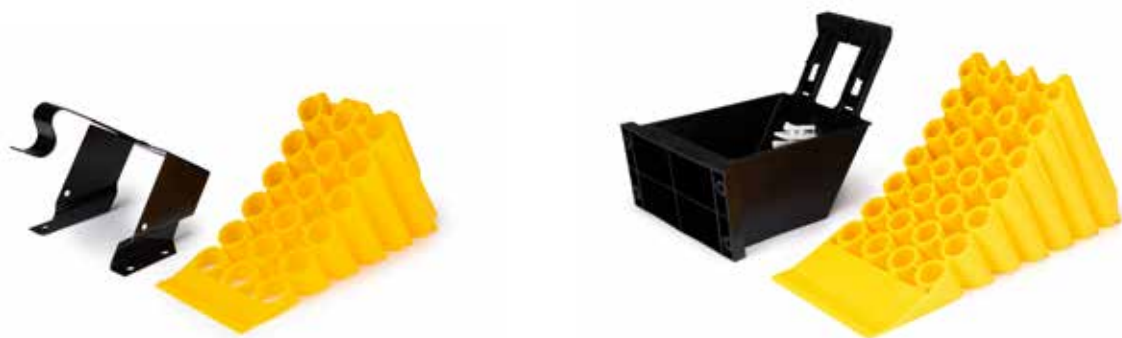


	H (mm)	W (mm)	D (mm)	Weight (kg)	Compatible with
1022	190	400	160	0.9	1022.1
1023	250	495	200	2.5	1023.1
HOLDERS					
1022.1	240	200	170	1.4	1022
1023.1	210	-	-	0.9	1023



Foldable

Wheel chocks

Compact, strong and durable. Made from UV stabilised HDPE with a zinc coated steel core. 40% lighter than traditional plastic wheel chocks and taking up much less space.



	H (mm)	W (mm)	D (mm)	Weight (kg)	Compatible with
1026	230	455 / 480	80 / 210	1.2	1026.1 / 1026.2
HOLDERS					
1026.1	-	-	-	-	1026
1026.2	-	-	-	-	



Fire and Safety

[Front loading](#) | [Top loading](#) | [Military](#) | [Safety](#) | [Fire extinguishers](#) | [Accessories](#)

A comprehensive range of storage solutions for fire extinguishers and other safety equipment.

Highly visible, easily accessible with a range of access and loading options.



	Front loading	Top loading	Military	Safety
Options for 2, 6, 9 and 12 kg extinguishers	✓	✓	✓	✓
Left or right hinged mounting	✓		✓	
Single and double cabinets available	✓			
Polycarbonate windows ¹	✓		✓	
Rubber door / lid seal prevents water ingress ²	✓	✓	✓	
UTAC approved - E2 73 R - 0117228³ / E2 73 R - 0117229⁴	✓	✓		
Buckle web strap	✓			
Internal tension strap		✓		
NATO approved			✓	

¹ Excludes 65 & 68 series

² Excludes 65, 68, & 75 series

³ 70 series

⁴ 65 series


Front loading

Fire extinguisher boxes

A range of single and double front loading fire extinguisher boxes designed for quick access in emergency situations with options for 6, 9 and 12 kg extinguishers.

Fitted with automotive grade rubber seals and UV blocking moulded-in polycarbonate windows. Left or right hinged mountings, buckle web straps and plastic toggle access as standard.

The 68 series does not feature a hinged lid with windows, but instead has a lid that unlatches and lifts off completely.



	Colour options	Series	H x W x D (mm)	Extinguisher (kg)	Fixing kit
JBTX68	● ●	68	680 x 260 x 260	6	-
JBWX70	● ●	70	700 x 320 x 255	6	KIT80
JBDX72	● ●	72	720 x 585 x 270	9-12	-
JBDX73	● ●	73	730 x 435 x 290	12	-
JBXX83	● ●	83	830 x 310 x 265	9-12	KIT80

X = Colour options: B: ● E: ●




Top loading

Fire extinguisher boxes

A range of top loading fire extinguisher boxes designed for quick access in emergency situations with options for 2, 6 and 9 kg extinguishers.

Double skinned lid with waterproof seal and plastic toggle access as standard. Internal tension strap helps prevent movement.

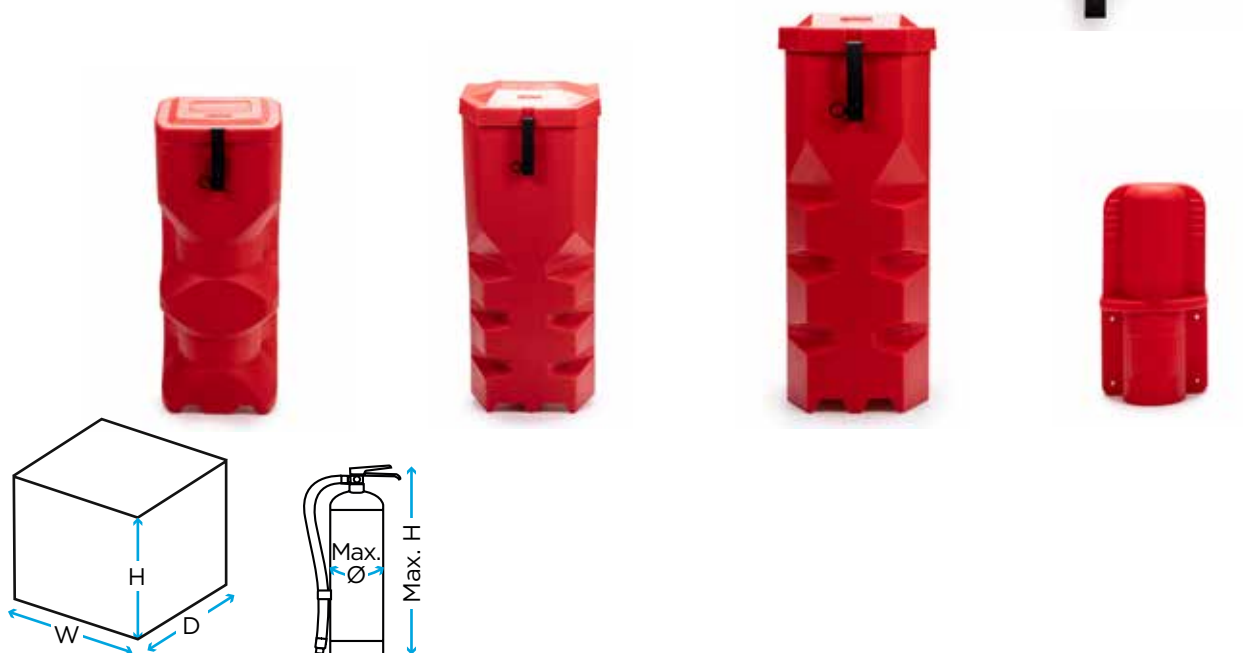


	Colour options	Series	H x W x D (mm)	Extinguisher (kg)	Max. Ø (mm)	Max. H (mm)	Fixing kit
JBFX64	● ●	64	640 x 250 x 250	6	170	590	KIT65
JBFX65	● ●	65	650 x 260 x 275	6	180	600	KIT55 / KIT56
JBFX75	● ●	75	750 x 300 x 300	9-12	230	710	KIT55 / KIT56
JFEX03	●	JFE	415 x 210 x 145	2	-	-	-

X = Colour options: B: ● R: ●



Strong, durable boxes available in NATO green for military use, supplied with fixing brackets already attached.


Independently drop and vibration tested (-35°C).



	Colour options	Series	H x W x D (mm)	Extinguisher (kg)	NATO. No	Fixing kit
JBFM65K	●	65	650 x 260 x 275	6	6MT1/2540-99-891-7436	KIT56
JBWM70KZ	●	70	700 x 320 x 255	6	6MT1/2540-99-0751-9118	KIT55



A range of top loading safety boxes ideal for first aid and spill kit storage.



	Colour options	Series	H x W x D (mm)	Capacity (l)
JBFA65	●	65	650 x 260 x 275	-
JBEA66*	●	66	660 x 300 x 435	60
JBFA75	●	75	750 x 300 x 300	-

*Also available with anti-static strip - JBEA66T



These dry powder fire extinguishers offer a combination of fire performances suitable for use on Class A, B and C type fires. Multi-purpose powder extinguishers may also be used on Class E fires, electrically energised equipment such as computers, with less than 35 kv.

The cylinders are manufactured with high quality metal sheeting: **DC04**, and have a polyester external coating (RAL3002), giving them high resistance against corrosion and UV degradation.

All extinguishers are provided with a demountable manometer and an internal pressure checking valve. The 6 and 9 kg extinguishers are provided with a high resistance PVC hose assembly.

Manufactured in accordance with the following quality standards:

Directive: Pressure equipment 97/23/CE

Conformance Standard: Third party Certified with Norm EN 3-7:2007 +A1:2007 and EN 3-8:2006 "Portable Fire Extinguishers"



	Extinguishing agent (kg)	Rating	Height (mm)	Cylinder Ø (mm)	Charged weight (kg)	Fitting / Cabinet
J-EXT2KG	2 (+/- 3%)	13A 70B C	385	105	3.75	JFEX03 / Bracket
J-EXT3KG	3 (+/-2%)	21A 113B C	365	125	5.2	Bracket
J-EXT6KG	6 (+/- 3%)	27A 183B C	525	150	9.9	JBFR65 / JBTE68 / JBWE70
J-EXT9KG	9 (+/- 3%)	43A 233B C	560	185	13.25	JBFR75 / JBXE83

Accessories

Fire and Safety



KIT50 - Rubber strap.



KIT51 - Buckle web strap.



KIT-TOGGLE - Spare plastic toggle kit containing 2 plastic toggles, 4 hinge pins and 2 lynch pins.



KIT55 - Kit for mounting 65 and 75 series boxes at an angle of 30° or 60°.



KIT56 - Kit for mounting 65 and 75 series boxes in a horizontal or vertical position. Also suitable for some front loading boxes.



KIT65 - Kit mounting 64 series to at an angle of 30° or 60°.



KIT80 - Kit for mounting 70 and 83 series boxes to a landing leg. Suitable for 110 / 135 mm wide landing legs.

LABELS - 10 per kit.



KIT-LAB-FIRE



KIT-LAB-ADR



KIT-LAB-FIRSTAID



KIT-LAB-SPILLKIT

Appendix

Mounting | Storage | Spray suppression | Palletisation |
Conditions of sale and delivery



IMPORTANT


All fitment of our product must comply with any legislation in force in the country relevant to your circumstances. Please see our section on the European legislation and check for local variants to this law with your local vehicle inspectorate. As there are many ways of fitting mudguards in a satisfactory manner, we offer commonly used methods and recommendations gained from experience of mudguard manufacture. Please accept these as helpful hints when deciding on the quickest and best method of fitment to ensure the long life of the product.

Single arch mudguards

These can be fitted using a variety of methods, but the function of the fixings is to support the mudguard and spread the weight it carries. Mudguards are exposed to the force of the wind whilst travelling at speed and the weight of heavy flaps which may be full of mud or snow. Therefore, correct support from the fixing method will make the mudguard last much longer and appear pleasing to the eye.



Stay positioning is very important as stays fitted too high give little support and stays fitted at an incorrect distance apart or at any angle other than 90° to the chassis can cause the mudguard valance to buckle. It is possible to extend the span of a mudguard a little by 'pulling out' the product on the stays but trying to reduce the span rarely works.

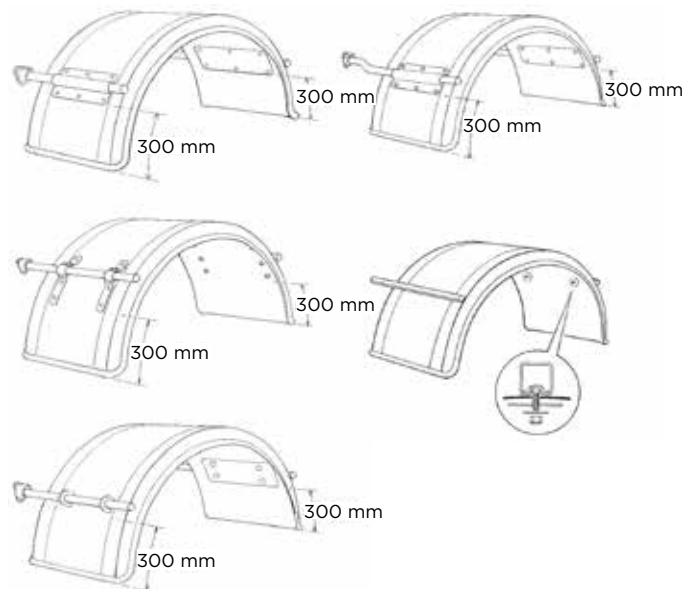

Flat tops

The flat top allows for fitment directly to the floor of the body of the vehicle thus saving cost and weight. We recommend fitment to each corner of the mudguard with a 60 mm washer. Of course, stays can also be used as illustrated in the single arch mudguards.

Sections

Primarily used in countries without a spray suppression law. The most commonly found problem here is the rotation of the wing on the single stay to which it is fitted. A tight grip on the stay combined with good support along the length of the mudguard is important.

Tandems

The one-piece tandem should be fitted with at least three supports. The picture shows four supports which will prevent distortion and make the mudguard look good for a long time.



Multiple axles

On close coupled axles (less than 250 mm apart) there is no need to fit an integral spat between each axle, providing a spray suppressive valance is fitted. If this is not the case a spat is required between each axle, although this does not have to include a spray suppressive liner material. On vehicles with axles greater than 250 mm apart then each axle must be fitted with the Integral Spat. Generally, the flap should be 200 mm or less from the ground. (300 mm on last axle if $R_v \leq R$ or appropriate with suspension characteristics).

Toolboxes

Toolboxes are best fixed using our support bracketry which ensures that even heavy loads do not cause damage to the box. Under European law our toolboxes can be used in place of a section of a side guard rail and several companies fit toolboxes to the vehicle to act as a side guard rail.



How to store and stack mudguards

Mudguards are flexible plastic components that until fitted to a vehicle, require correct handling and storage technique to prevent distortion or damage.

1. Stack loosely on their side (A).
2. Do not push tightly together.
3. If stacking multiple layers use hardboard between the layers (A).
4. Do not stack on top of each other (B).
5. Batons should be used on HighGard pallets when shrink wrap is used to protect the mudguards (C).
6. Transhipment through carrier hubs should be kept to a minimum.
7. Store indoors or under cover in 'hot' countries as temperatures of 70°C - 90°C have been measured on black mudguards increasing the risk of stacking distortion.
8. Never drag mudguards along the ground (a common practice) as scratches will result that may not be appreciated by the customer (D).
9. If you have any problems, please always follow our Quality Control procedure and quote the information found on the product.
10. Most distorted mudguard complaints, when investigated, are either caused by the above features, stays not perpendicular or that have been incorrectly fitted or poor fitment technique. Please follow the advice section on mudguard fitment.



EC Type Approval is a legal requirement for all EU countries to have a common process for the “approval of motor vehicles and their trailers and of systems, components and separate technical units intended for such vehicles”. This means European approval has been extended from cars to all commercial vehicles and trailers. The manufacturer can now apply for homologation in any member state.

The relevant directive for EC Type Approval is frame directive 2007/46/EC which was introduced on 29 October 2007 and provides a European-wide mechanism for ensuring that these vehicles meet appropriate environmental and safety standards.

To obtain above homologation, vehicles of categories N and O must be fitted with anti-spray devices according to Regulation (EC) No. 661/2009 amended by Regulation (EC) No. 407/2011. The former repeals ‘Spray Directive’ 91/226/EEC amended by Directive 2010/19/EU. The requirements set out in Directive 91/226/EEC are to be carried over to this Regulation. Regulation (EU) No 109/2011 implements Regulation (EC) No. 661/2009. The former ‘shall be binding in its entirety and directly applicable in all Member States’. Member states must not refuse to grant EC or national type approval to a vehicle complying with above requirements but must refuse both EC and national type approval should a vehicle not comply with these requirements. When applying for EC type approval for completed vehicles under above Frame Directive, vehicle types which already were granted type approval covering spray suppression, EC or national, need not comply with the Regulation (EC) No. 661/2009.

IMPORTANT

With effect from 01 November 2014 Regulation (EC) No. 661/2009 repeals 50 Directives in Annex IV of Frame Directive 2007/46/EC and replaces them with equivalent UNECE Regulations (United Nations Economic Commission of Europe) as detailed in Regulation (EC) No 407/2011.



Scope

Goods vehicles Category		Description	Weight	Spray directive
N		Motor vehicles with at least 4 wheels designed and constructed for the carriage of goods		Mandatory (Exemptions see below)
N₁		Goods vehicles	No more than 3.5 t	Optional
N₂		Medium size vans and trucks	Over 3.5 t but no more than 12 t	Optional up to 7.5 t Mandatory over 7.5 t
N₃		Heavy trucks and vans	Over 12 t	Mandatory

Trailers

O		Trailers (including semi-trailers)		Mandatory (Exemptions see below)
O₁		Small trailers	No more than 0.75 t	Optional
O₂		Trailers	Over 0.75 t but no more than 3.5 t	Optional
O₃		Medium trailers	Over 3.5 t but no more than 10 t	Mandatory
O₄		Heavy trailers	Over 10 t	Mandatory

Note: Off-road vehicles as defined in Annex II (Point 4) in Directive 2007/46/EC are exempted.

1. All Measurements to be taken on an unladen vehicle, with bodywork, and in running order with coolant, lubricants, fuel, tools, spare wheel and driver.
2. Tractor units of articulated vehicles should have an unladen semi-trailer hitched to the 5th wheel.
3. For semi-trailers of articulated vehicles, the load platform should be horizontal.
4. In all cases the wheels should face straight ahead with all tyres in nominal new condition.

Spray suppression

Flap & Mudguard Fitment



KEY

$V = 100 \text{ mm max}$
- Distance between
Mudguard valance
and tyre wall -



Air
suspension



Mechanical
suspension



Steered



Vehicle



Non-steered



$Rv \leq 1.5 R$



$Rv \leq 1.25 R$



$Rv \leq 1.8 R$




$> 7.5 \text{ t}$

$Rv \leq 1.5 R$




* Also applies to the first wheel of multiple
axles

* $\leq 300 \text{ mm}$ on last axle if $Rv \leq R$
or appropriate with suspension
characteristics

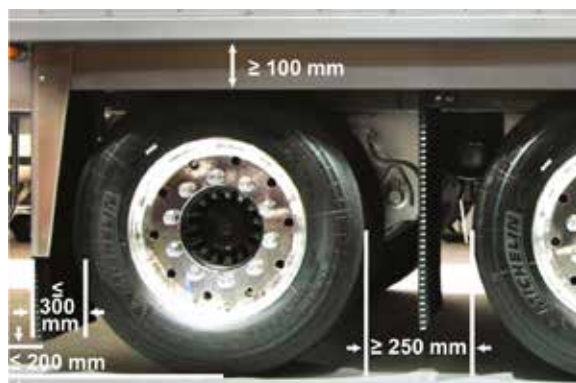

**Flap &
Valance
Fitment**

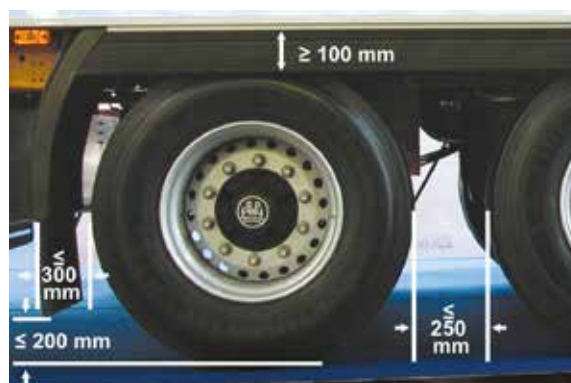

**Multiple Axle
Flap
Requirements**



Flaps required

No flaps required

Above information is to our best knowledge true and accurate, but all recommendations or suggestions are made without guarantee. The following Directives/Regulations were consulted: 2007/46/EC, 2010/19/EU, No 661/2009, No 109/2011, No 407/2011, No 678/2011, No 214/2014.

For updates, please refer to: <https://eur-lex.europa.eu>

HighGard – Single arch

Product	Pallet size H x W x D (mm)	Pallet quantity
HL09	1985 x 2100 x 1300	100 pairs
HL26A / HL26B	1965 x 2100 x 1300	80 pairs
HL28 / HL30C / HL31 / HL31A	2090 x 2100 x 1300	80 pairs
HL33 / HL34 / HL35	2195 x 2100 x 1300	60 pairs
HL38C	1800 x 2100 x 1300	60 pairs
HL39B	1860 x 2100 x 1300	60 pairs
HL40 / HL41	1925 x 2100 x 1300	60 pairs
HL42A / HL42B	2065 x 2100 x 1300	60 pairs
HL43A / HL43D / HL43G	2110 x 2100 x 1300	60 pairs
HL45A / HL45B / HL45D / HL45E	2235 x 2100 x 1300	60 pairs
HL47 / HL47B / HL47D / HL47F / HL47G / HL47M	2300 x 2100 x 1300	40 pairs

HighGard - Sections

Product	Pallet size H x W x D (mm)	Pallet quantity
HLS26A / HLS26B	1930 x 1300 x 1100	80
HLS31 / HLS31B / HLS40 / HLS43A / HLS45A / HLS47	1965 x 1300 x 1100	50

Information provided for guidance only. Actual quantities may vary depending on the type of transport and the products ordered.

J-Wing – Single arch

Product	Pallet size H x W x D (mm)	Pallet quantity
J01 / J06C	1965 x 2100 x 1300	100 pairs
J01SE		120 pairs
J09		84 pairs
J12 / J19A / J22A		60 pairs
J23 / J24A / J24B / J24C / J25		40 pairs
J27 / J28 / J31 / J33 / J34 / J39C		45 pairs
J29		39 pairs
J30C / J38C / J42 / J45C		30 pairs
J35 / J39 / J39B / J41		36 pairs
J43A / J43B / J44 / J47 / J47B		24 pairs
J45A		20 pairs
J45B		26 pairs
J48		22 pairs

J-Wing – Sections

Product	Pallet size H x W x D (mm)	Pallet quantity
JS19 / JS21 / JS23	1930 x 1300 x 1100	54 pairs
JS26 / JS29 / JS30A		45 pairs
JS40		40 pairs
JS47		48 pairs

J-Wing – Flat tops

Product	Pallet size H x W x D (mm)	Pallet quantity
J05F	1965 x 2100 x 1300	100 pairs
J25SF / J27F / J28F		60 pairs
J36F		45 pairs
J41F / J43F / J46F		30 pairs

Information provided for guidance only. Actual quantities may vary depending on the type of transport and the products ordered.

J-Wing – Tandems

Product	Pallet size W x D (mm)	Pallet quantity
JT610	2740 x 660	5 pairs

J-Wing – Small trailer

Product	Pallet size W x D (mm)	Pallet quantity
JT1864	1600 x 800	60 pairs
JT2082		50 pairs
JT2086	2100 x 1300	50 pairs

J-Wing – Spats

Product	Pallet size H x W x D (mm)	Pallet quantity
SP450	1870 x 1350 x 1100	24 boxes (5 pairs per box)
SP650	2060 x 1320 x 1260	14 boxes (5 pairs per box)
L28	1880 x 1300 x 1100	12 boxes (10 pairs per box)
L43		12 boxes (5 pairs per box)
L46	1590 x 1380 x 1100	6 boxes (6 pairs per box)
L54	1880 x 1300 x 1100	12 boxes (5 pairs per box)
L61		12 boxes (5 pairs per box)
L66	1590 x 1380 x 1100	6 boxes (5 pairs per box)

Information provided for guidance only. Actual quantities may vary depending on the type of transport and the products ordered.

XGard – Single arch

Product	Pallet size W x D (mm)	Pallet quantity
JX24 / JX26 / JX33	2100 x 1100	60 pairs
JX43A / JX45		30 pairs

XGard – Sections

Product	Pallet size W x D (mm)	Pallet quantity
JXS45	1300 x 1100	30 pairs

XGard – Flat tops

Product	Pallet size H x W x D (mm)	Pallet quantity
JX06F	1930 x 2100 x 1000	50 pairs
JX37F		37 pairs

XGard – Tandems

Product	Pallet size W x D (mm)	Pallet quantity
JT650N	2740 x 660	15 pairs
JTZ105	2100 x 1300	30 pairs

XGard – Small trailer

Product	Pallet size W x D (mm)	Pallet quantity
JW21150	1600 x 800	40 pairs
JW2483		

Onboard storage

Product	Pallet size H x W x D (mm)	Pallet quantity
JBZ450	1765 x 1300 x 1100	24
JBZ520	1450 x 1300 x 1100	24
JBZ580	1965 x 1300 x 1180	24
JBZ600	2100 x 1300 x 1100	16
JBZ620	1795 x 1300 x 1220	20
JBZ620A	1765 x 1300 x 1100	24
JBZ650	2085 x 1320 x 1100	16
JBZ700	2090 x 1300 x 1100	14
JBZ800	2085 x 1300 x 1100	12
JBZ800A	1970 x 1300 x 1100	15
JBZ900	1640 x 1300 x 1100	6
JBZ1000 / JBZ1200	2085 x 1300 x 1100	8
JBH67 / JBL67	2120 x 1350 x 1150	50
JBC40	1820 x 1300 x 1120	60

Document holders

Product	Pallet size H x W x D (mm)	Pallet quantity
1005	2030 x 1410 x 1100	384
1006	2130 x 1340 x 1100	135

Information provided for guidance only. Actual quantities may vary depending on the type of transport and the products ordered.

Fire and Safety

Product	Pallet size H x W x D (mm)	Pallet quantity
68 series	1895 x 1370 x 1100	56
70 series	2030 x 1410 x 1100	48
72 series	2195 x 1300 x 1150	23
73 series	1895 x 1325 x 1100	24
83 series	2090 x 1325 x 1100	38
64 / 65 series	1990 x 1370 x 1100	56
66 series	1930 x 1320 x 1100	24
75 series	2060 x 1300 x 1100	34
JFE series	2070 x 1200 x 1350	225

The Customer's attention is drawn in particular to the provisions of clause 13.

1. GENERAL

- a. These conditions shall be deemed to be incorporated as conditions in any order or contract accepted by Jonesco (Preston) Ltd (hereinafter referred to as 'Jonesco', 'Us' and 'We') to the exclusion of any other terms that you, the Customer (also referred herein after as 'You') seek to impose or incorporate, or which are implied by trade, custom, practice or course of dealing.
- b. The Customer is responsible for ensuring the Goods ordered are suitable for the purpose for which they were required.
- c. The contract constitutes the entire agreement between the parties.
- d. No agent or stockist or other third party and no employee of ours other than a director of Jonesco selling our Goods is authorised to transact any business which gives any warranty, makes any promise or any representation or incurs any liability on our behalf.
- e. We reserve the right to alter our product designs or construction details without notice.
- f. When these conditions or any other conditions which any other party may seek to incorporate into any contract conflict, these conditions shall prevail.
- g. Any notice required to be served pursuant to these conditions shall be served as follows:
 - i. To the Seller – To Jonesco (Preston) Ltd. Pitman Way, Fulwood, Preston, Lancashire, United Kingdom, PR2 9ZD.
 - ii. To the Customer – to such address as the Customer may notify to us or in default of notification to the address from which the goods an/or services are or were ordered or if the Customer are a company, at our option to the Customer's registered office.

A properly addressed notice sent by first-class post to destinations in the United Kingdom or the Republic of Ireland shall be deemed to have been received three days after the date of its despatch. A Notice sent by registered airmail to any other destination shall be deemed to have been received seven days after the date of its despatch.
- h. The provisions of clause 1(g) shall not apply to the service of any proceedings or other documents in any legal action.

2. TERMS OF PAYMENT

- a. United Kingdom and Eire: Payment by last working day of the month following the date of invoice. Time of payment is of the essence. Pending the opening of a credit account all Goods must be paid for in advance.
- b. Other Overseas: The method of payment shall be determined prior to or at the time of confirmation of the order. Any bank charges on export bills are payable by the Customer.
- c. If the Customer fails to make any payment due to Us under the Contract by the due date for payment (due date) then the Customer shall pay interest at the rate of 2% per month on extended terms of payment and overdue accounts. Such interest shall accrue on a monthly basis from the due date until the date of actual payment of the overdue amount, whether before or after judgment. the Customer shall pay the interest together with the overdue amount.
- d. The Customer shall on demand indemnify Us against all costs and expenses (including legal and other reasonable professional costs and expenses) suffered or incurred by Us in connection with the recovery of an outstanding debt in breach of clause 2(a) or 2(b) as applicable. This clause 2(d) shall survive termination of the Contract.
- e. When the account of a Customer becomes overdue, We may at our discretion withhold or suspend performance of any contractual obligation to you.
- f. The Customer shall pay all amounts due under the Contract in full without any deduction or withholding except as required by law and the Customer shall not be entitled to assert any credit, set-off or counterclaim against Us in order to justify withholding payment of any such amount in whole or in part. We may at any time, without limiting any other rights or remedies We may have, set off any amount owing to Us by the Customer against any amount payable by Us to the Customer.

3. TITLE

- a. Property in the Goods shall remain with Us until the Customer has paid to Us the price of all Goods supplied under the Contract for the supply of the Goods and all other sums owing at any time by the Customer to Jonesco on any ground whatsoever (including, without prejudice to the generality of the foregoing, all sums owing by the Customer to Jonesco at any time in respect of any supply of Goods under any other contract).
- b. The Customer undertake that until title has passed to the Customer, in the event that it buys from a party other than Jonesco supplies of goods that are or were manufactured by or sold by Jonesco (or are similar to such goods) with the intention of retaining such goods as stock the Customer will clearly mark each of those goods in the said supply in order to distinguish each of those goods from Goods sold by Jonesco to You.

- c. Until title to the Goods has passed to the Customer, the Customer shall:
 - i. hold the Goods on a fiduciary basis as our bailee;
 - ii. not remove, deface or obscure any identifying mark or packaging on or relating to the Goods;
 - iii. maintain the Goods in satisfactory condition and keep them insured against all risks for their full price from the date of delivery;
 - iv. give Jonesco such information relating to the Goods as We may require from time to time,
 - v. notify Jonesco immediately if the Customer becomes subject to any of the events listed in clause 16(b),
- d. Subject always to and without prejudice to clause 3(c) above, You are entitled to sell the Goods to a purchaser or purchasers by way of bona fide sale in the ordinary course of business at any time that (and insofar as) Jonesco shall permit and provided always that your entitlement shall cease immediately and without notice on the occurrence of any one or more of the events specified in clause 16(b).
- e. If before title to the Goods passes to the Customer, the Customer becomes subject to any of the events listed in clause 16(b), or We reasonably believe that any such event is about to happen and notify the Customer accordingly, then, provided that the Goods have not been resold, or irrevocably incorporated into another product, and without limiting any other right or remedy:
 - i. We may at any time require the Customer to deliver up the Goods, and if the Customer fails to do so promptly, the Customer irrevocably grants Jonesco a licence to enter (by Jonesco itself, its servants or agents and with or without vehicle) without notice upon lands or premises owned, used or occupied by You for the purpose of taking possession of Goods the property of Jonesco; and
 - ii. agree to render without charge all assistance as Jonesco may request to Jonesco and to our servants or agents for the purpose of Jonesco's identifying and taking possession of Goods the property of Jonesco.
- f. In the event that You sell the Goods to a purchaser or purchasers in accordance with clause 3(e), You sell as principal in relation to the purchaser or purchasers and have no right to commit Jonesco to any contractual relationship with or liability to the purchaser or purchasers or any third party.
- g. The Customer undertakes that in the event that You sell any Goods supplied by Jonesco You will sell those Goods (of the type required for the particular sale) as have at the material time been longest in your possession.

4. PRICES

- a. All prices are subject to alteration without notice. If during the currency of any contract there is an increase in the cost of labour and/or material required in connection with or the purpose of such contract over the cost of such labour and/or materials prevailing at the date of acceptance such nett increase of cost shall be added to the contract price and be payable by the Customer.
- b. All prices are subject to the addition of VAT when appropriate. the Customer shall, on receipt of a valid VAT invoice, pay such additional amounts in respect of VAT as are chargeable on the supply of the Goods.
- c. Special orders placed with Jonesco may be subject to variances from the normal list price. Quotations of price will be given at the time of order placement and will be deemed to be binding solely for that particular Special Order.

5. CARRIAGE

- a. UK Mainland: The method of carriage shall be determined by Us and carriage charges will be payable by the Customer in addition to the price of Goods:
 - i. we will use our reasonable endeavours to notify the Customer of the carriage charges prior to delivery of the Goods;
 - ii. if the Customer requests a particular method or time of delivery or other particular arrangements for delivery of the Goods the Customer will be reimburse Jonesco for any additional costs incurred in delivery of the Goods.
- b. UK non-mainland and Eire: carriage charges will be advised to the Customer prior to Jonesco's acceptance of the Customer's order.
- c. Where practical, and under our discretion, We will deliver Goods on our own vehicles. All such deliveries will be free of charge if over £50 if part of a planned delivery run. Due to their bulk environmental products do not qualify for this service.

6. PACKING

- a. United Kingdom: any stillages or custom packaging remain our property at all times and will be charged for if not returned in good condition within one month from the date of delivery.
- b. Overseas: Export packing will be charged extra. Cases are non-returnable.

7. RISK, DAMAGE, LOSS AND NON-DELIVERY

- a. Risk in the Goods will pass to the Customer upon:
 - i. Delivery of the Goods to the Customer's premises or to a third party address as instructed by the Customer in respect of a sale to a UK or Eire based customer; and
 - ii. Delivery f.o.b. UK Port in respect of any sale to an overseas based customer (unless otherwise agreed between the parties in writing)
- b. The Customer must inform Us within three (3) days of the date of passage of risk pursuant the clause 8(a) below (or the date of advised delivery in the case of non-deliveries) if a claim for damage, loss in transit, or non-delivery of any of the Goods is to be made and must follow up such notification with a written confirmation within 7 days. In respect of the Customer's obligation here under, time shall be of the essence. **NO CLAIMS WILL BE CONSIDERED AND NO LIABILITY ACCEPTED BY US UNLESS NOTIFICATION IS RECEIVED WITHIN THE TIME SPECIFIED.**

8. RETURNED GOODS

- a. All Goods correctly supplied in accordance with Customer's order but which are subsequently returned will only be credited provided that:
 - i. Our prior written consent has been obtained. We reserve the absolute right to decline to accept returns.
 - ii. The Goods are listed in the current price list, are of current design, and in resaleable condition including packaging.
 - iii. The Goods must be accompanied by a packing note stating the reason for return, the advice note/invoice number against which the Goods were supplied and the returns authority number as provided by the Despatch Department of Jonesco. A Jonesco returns label should also be attached to the Goods.
 - iv. The cost of the outward carriage is paid by the Customer, and a handling charge will be payable by the Customer when the Goods are exchanged. The value of the handling charge will be at Our discretion and will be quoted as a percentage of the nett invoice value of the goods returned.

Goods supplied correct to customer specification on Special Orders placed with Jonesco are not accepted for return.

9. DESCRIPTION

- a. Whilst every endeavour has been made to ensure that the Goods are accurately described and believed to be fit for the purpose as mentioned in our catalogues, wall charts etc, no warranty or representation to this effect is given, and no responsibility will be accepted in the event of any error or misdescription or any such unfitness, or any damage relating there from.
- b. Photographs, illustrations, advertising matter and technical brochures generally represent the goods offered but are not binding in detail.
- c. We reserve the absolute right to make detailed alterations to the materials and specifications.
- d. Weights, dimensions, electrical power, water and compressed air and other supplies data, are estimated and deviations shall not be a ground for claim against Us.

10. DELIVERY OR ORDERS BY SCHEDULE

- a. Orders on which deliveries are to be made at a scheduled rate are accepted on the following conditions:
 - i. no delay of delivery can be taken as agreed unless You have received Our prior written consent.
 - ii. delay of any delivery beyond two months from the date originally agreed will not be accepted.
 - iii. at least 14 days notice must be given of any intention to delay deliveries.
 - iv. where We agree to a delay of delivery at a Customer's request We reserve the right to adjust the prices, if We find this necessary, and to make a charge for any extra costs incurred because of the delay.
 - v. each delivery shall constitute a separate transaction.
 - vi. quantities delivered in each time period in the schedule will be subject to a tolerance agreed in advance between Jonesco and the Customer.

11. DELIVERY QUOTATION

- a. Any date quoted for despatch is subject to stock remaining unsold upon receipt of the Customer's written order to proceed together with all necessary information and documents.
- b. Whilst every effort will be made to estimate delivery dates accurately they are not to be construed as forming part of the terms of the contract and time of delivery is not of the essence.

- c. Should We be delayed in or prevented from delivering the whole or any part of the Goods ordered by reason of any Force Majeure Event or the Customer's failure to provide Us with adequate delivery instructions or any other instructions that are relevant to the supply of the Goods then:
 - i. the Customer shall not be entitled to refuse to accept the Goods because of delay in delivery;
 - ii. we shall not be liable to the Customer for failure to despatch or deliver such Goods, and
 - iii. the date of delivery shall be extended until the operation of the cause or causes preventing delivery has ceased.

PROVIDED THAT in the event of such delay continuing for an unbroken period of 60 days We shall have the right by notice in writing to terminate the contract or contracts in question to the extent that they shall not have already been performed.

12. WARRANTIES

- a. Subject to the conditions set out below We warrant that the Goods will:
 - i. correspond with their specification at the time of delivery; and
 - ii. be free from defects in material and workmanship for a period of 12 months from the date of delivery.
- b. The above warranty is given subject to the following conditions:-
 - i. we shall be under no liability in respect of any defect in the Goods arising from any drawing, design or specification supplied by You as the Customer;
 - ii. we shall be under no liability in respect of any defect arising from fair, wear and tear, wilful damage, negligence, abnormal working conditions, failure to follow our instructions (whether oral or in writing), carelessness on the part of the user, misuse or alteration or repair of the Goods without our approval;
 - iii. we shall be under no liability under the above warranty (or any other warranty condition or guarantee) if the total price for the Goods has not been paid by the due date for payment;
 - iv. the above warranty does not extend to parts, materials or equipment not manufactured by Us in respect of which You the Customer shall only be entitled to the benefit of any such warranty or guarantee as is given by the manufacturer to Us;
- c. Subject as expressly provided in these conditions, and except where the Goods are sold to a person dealing as a consumer (within the meaning of the Unfair Contract Terms Act 1977), all warranties, conditions or other terms implied by statute or common law as to quality, fitness, compliance with description or sample of the whole or part of the Goods, or any replacement thereof, or as to the quality of any work or repair or replacement or otherwise, are excluded to the fullest extent permitted by law.
- d. Any claim by You as a Customer which is based on a breach of clause 12(a) shall (whether or not delivery is refused by You) be notified to Us in writing within 7 days from the date delivery or (where the defect or failure was not apparent on reasonable inspection) within a reasonable time after discovery of the defect or failure. If delivery is not refused, and You do not notify Us accordingly, You shall not be entitled to reject all or part of the Goods and We shall have no liability for such defect or failure, and You shall be bound to pay the price as if the Goods had been delivered in accordance with the contract,

Where the Goods are delivered to premises outside of the United Kingdom the period of 7 days in this clause 12(d) shall be extended to 28 days;
- e. Where any valid claim in respect of any of the Goods which is based on any breach of clause 12(a) is notified to Us in accordance with these conditions, We shall at our absolute discretion be entitled to replace the Goods (or the part in question) free of charge or, refund to You the price paid for the Goods (or a proportion as part of the price paid), but We shall have no further liability to You;

13. LIMITATION OF LIABILITY

- a. Nothing in these Conditions shall limit or exclude Jonesco's liability for:
 - i. death or personal injury caused by its negligence, or the negligence of its employees, agents or subcontractors (as applicable);
 - ii. fraud or fraudulent misrepresentation;
 - iii. breach of the terms implied by section 12 of the Sale of Goods Act 1979;
 - iv. defective products under the Consumer Protection Act 1987; or
 - v. any matter in respect of which it would be unlawful for Us, to exclude or restrict liability.
- b. Subject to clause 13(a) Jonesco shall not be liable to You whether in contract, tort (including negligence) breach of statutory duty or otherwise, for any loss of profit, or any indirect or consequential loss arising under or in connection with the Contract, and which arise out of or in connection with the supply of the Goods or their use or resale by You, and Jonesco's total liability to the Customer in respect of all other losses arising under or in connection with the

contract, whether in contract, tort (including negligence), breach of statutory duty or otherwise, shall not exceed the price paid of the Goods, except as expressly provided in these conditions;

14. SEVERANCE

- a. If any of the provisions (or part of any provision) of this contract are held to be invalid, illegal or unenforceable for any reason then the provision or part provision shall to the extent required, be read as if the invalid provisions had to that extent been deleted and the validity and enforceability of the remaining provisions of this contract shall not be affected thereby.
- b. If any invalid, unenforceable or illegal provision of the contract would be valid, enforceable and legal if some part of it were deleted, the provision shall apply with the minimum modification necessary to make it legal, valid and enforceable.

15. FORCE MAJEURE

We shall not be liable for any failure or delay in performing our obligations under the extent that such failure or delay is caused by a Force Majeure Event.

A Force Majeure Event means any event beyond our reasonable control, which by its nature could not have been foreseen or if it could have been foreseen, was unavoidable, including strike, lock-out, stoppage of work, or other industrial disputes (whether involving our own workforce or a third party's), failure of energy sources or transports network, riot, war, terrorism, civil commotion, interference by civil or military authorities, national or international calamity, armed conflict, malicious damage, breakdown of plant or machinery, nuclear, chemical or biological contamination, sonic boom, explosions, collapse of building structures, acts of God including, fires, floods, storms, earthquakes, loss at sea, epidemics or similar events, natural disasters or extreme adverse weather conditions, or default of suppliers or subcontractors, or defective materials.

16. TERMINATION

- a. If the Customer become subject to any of the events listed in clause 16(b), or We reasonably believe that You are about to become subject to any of them and notify You accordingly, then, without limiting any other right or remedy available to Jonesco, We may cancel or suspend all further deliveries under the Contract or under any other contract between the Customer and Jonesco without incurring any liability to the Customer, and all outstanding sums in respect of Goods delivered to the Customer shall become immediately due.
- b. For the purposes of clause 16(a), the relevant events are:
 - i. (being a company) an application is made to court, an order is made, for the appointment of an administrative receiver You over all or part of your assets or undertaking;
 - ii. (being a company) a person becomes entitled to appoint a receiver over your or a receiver is appointed over your assets;
 - iii. a creditor or encumbrancer of your's attaches or takes possession of, or a distress, execution, sequestration or other such process is levied or enforced on or sued against, the whole or any part of your assets and such attachment or process is not discharged within 14 days
 - iv. You suspend or threaten to suspend payment of your debts or are unable to pay or admit or state your inability to pay your debts as they fall due; or (being a company) is deemed unable to pay its debts within the meaning of section 123 of the Insolvency Act 1986, or (being an individual) is deemed either unable to pay its debts or as having no reasonable prospect of so doing, in either case, within the meaning of section 268 of the Insolvency Act 1986, or (being a partnership) has any partner to whom any of the foregoing apply
 - v. You dispose or threaten to dispose of all or a material part of your assets whether by one or a series of transactions (Other than for the sole purpose of and followed by your reconstruction or amalgamation, approved by Jonesco);
 - vi. You commence negotiations with all or any class of your creditors with a view to rescheduling any of your debts, the Customer or make a proposal for or enter into any compromise, arrangement, voluntary arrangement or composition with your creditors;
 - vii. your directors make or state an intention to make or give notice of a proposal in relation to You for a voluntary arrangement under Part I of the Insolvency Act 1986;
 - viii. (being a company) a petition is filed, a notice is given, or any order is made, for or in connection with your winding-up or administration;
 - ix. (being a company) a resolution (other than for the sole purpose of and followed by your reconstruction or amalgamation, approved by Jonesco) is passed for your voluntary winding-up;
 - x. the Customer are dissolved;
 - xi. (being an individual) the Customer are the subject of a bankruptcy petition or order;

- xii. the Customer suffer the levy or enforcement of any execution, distress, sequestration, detention or other process on the whole or part of any property or premises or other assets;
 - xiii. (being a company) an application is made to court, or an order is made, for the appointment of an administrator or if a notice of intention to appoint an administrator is given or if an administrator is appointed over the Customer;
 - xiv. (being a company) a floating charge holder over your assets has become entitled to appoint or has appointed an administrative receiver;
 - xv. any event occurs, or proceedings are taken, with respect to the Customer in any jurisdiction to which the Customer are subject that has an effect equivalent or similar to any of the events mentioned in clause 16(b)(i) to 16(b)(xv) (inclusive);
 - xvi. the Customer suspend, threaten to suspend, You cease or threaten to cease to carry on all or substantially the whole of your business trade;

your financial position deteriorates to such an extent that in our opinion your capability to adequately fulfil its obligations under the Contract has been placed in jeopardy; and
 - xvii. (being an individual) the Customer die or, by reason of illness or incapacity (whether mental or physical), are incapable of managing your own affairs or becomes a patient under any mental health legislation.
- c. Termination of the Contract, however arising, shall not affect any of the parties' rights and remedies that have accrued as at termination. Clauses which expressly or by implication survive termination of the Contract shall continue in full force and effect.

17. ASSIGNMENT AND SUBCONTRACTING.

- a. We may at any time assign, transfer, charge, subcontract or deal in any other manner with all or any of our rights or obligations under the Contract.
- b. the Customer may not assign, transfer, charge, subcontract or deal in any other manner with all or any of your rights or obligations under the Contract without our prior written consent.

18. WAIVER

A waiver of any right or remedy under the contract is only effective if given in writing and shall not be deemed a waiver of any subsequent breach or default. No failure or delay by a party to exercise any right or remedy provided under the contract or by law shall constitute a waiver of that or any other right or remedy, nor shall it preclude or restrict the further exercise of that or any other right or remedy. No single or partial exercise of such right or remedy shall preclude or restrict the further exercise of that or any other right or remedy.

19. THIRD PARTY RIGHTS.

A person who is not a party to the Contract shall not have any rights under or in connection with it.

20. JURISDICTION

This contract and any dispute or claim arising out of or in connection with it or its subject matter or formation (including non contractual disputes and claims) is governed by and construed in all respect by English Law and the Customer submits to the exclusive jurisdiction of the English Courts.

21. CUSTOMER CONDITIONS OF PURCHASE

In all instances Jonesco's Conditions of Sale stated herein override any separate Terms and Conditions of Purchase stated by Jonesco's customers.

22. VARIANCES TO STANDARD CONDITIONS OF SALE

We reserve the right to vary Jonesco's standard Conditions of Sale as stated herein. Any variation will be notified in writing to individual customers effected by these variances and will only apply in respect of goods purchased following such notification.

23. JONESCO CATALOGUES

Jonesco. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means electronic, mechanical, photographic, recording or otherwise without the prior written permission of the publisher Jonesco (Preston) Ltd.

Smarter. Not harder.

+44 (0) 1772 706888

jonesco-plastics.com

sales@jonesco-plastics.com







+44 (0) 1772 706888

jonesco-plastics.com

sales@jonesco-plastics.com

